



DS INSTRUMENTS

40GHZ COMPACT SIGNAL GENERATOR



Description

Introducing the **SG4000L**, our latest portable and affordable high-frequency signal generator!

DS Instrument's new high-frequency microwave signal generator has been released! This new standard version offers the same low-noise performance of the **SG3000L**, but with a higher frequency band covering 25 to 40GHz. Like our SG6000 product line, this source is fully programmable via SCPI commands, or the front panel interface, making it more flexible than any competing product. High output power, wide bandwidth, and ultra-compact size make this the best value 40GHz source on the market.

SG4000L Standard 40GHz Device Features:

- Output frequency range covering **25 – 40GHz**
- Power control (25 – 40GHz calibrated): **-10dBm to +15dBm** (vernier and 0.5db steps)
- Excellent phase noise: **-82dBc @ 35GHz @ 10KHz offset**
- Sub-harmonic levels: **< -12dBc typical**
- Extremely small frequency step size: **2Hz**
- Ultra-low-noise 100MHz VCXO locked to internal TCXO or external 10MHz reference
- Internal precision high-frequency reference source (± 280 PPB 10MHz)
- MCX input for 10MHz clock source
- Compact powder-coated laser-etched enclosure
- Precision 2.92mm output jack (3.5mm compatible)
- Ethernet remote operation (DHCP)
- Windows control software included (USB & Network enabled)
- SCPI command aware via USB-C virtual COM port for remote control
- Front controls and bright OLED display for stand-alone usage
- Completely powered from USB-C, no DC adapter required!




Common microwave Applications:

- Automated testing environments
- General RF lab use
- Flexible LO sourcing
- Antenna design
- EMC testing
- Production verification and test setups
- Educational / university lab use
- Aerospace / Defense Research
- satellite link testing
- radar applications
- Ka-band development
- Up-converting and down-converting
- Wireless infrastructure design
- Transponder verification
- 5G testing
- mm-wave technology

PC Control Application:






Mechanical Specifications (5-inch narrow case):

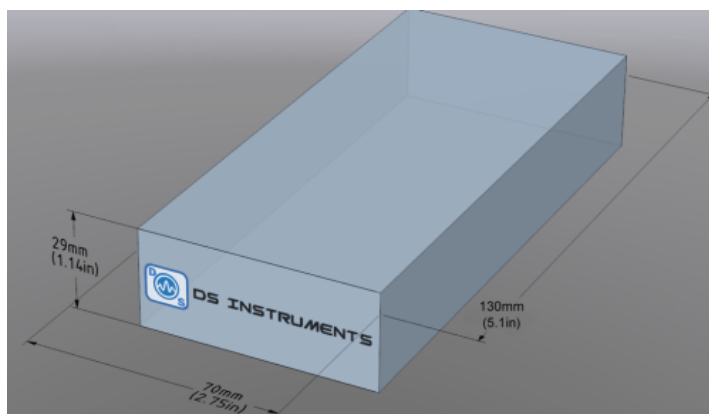



Performance Plots (CW Output):

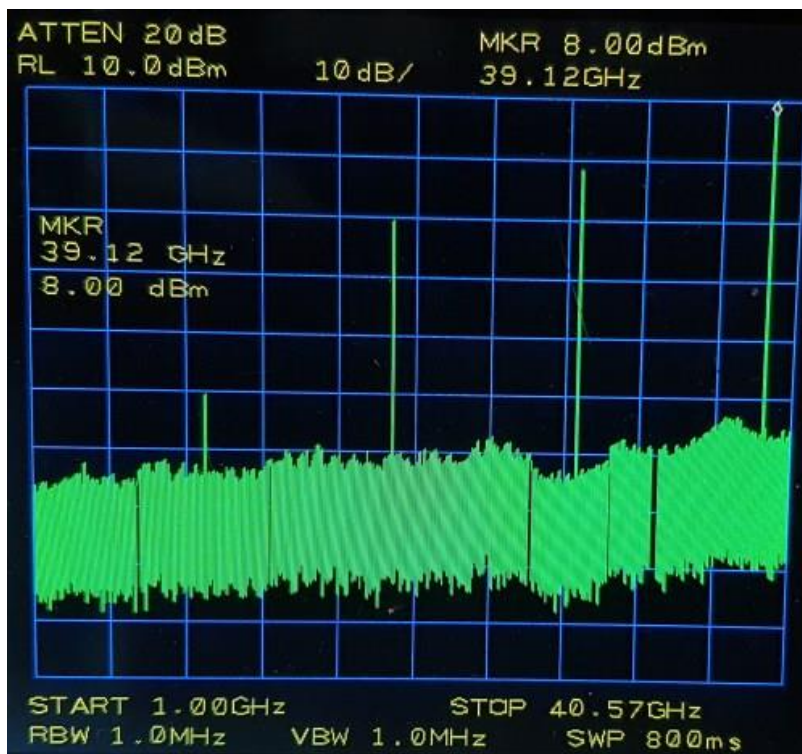

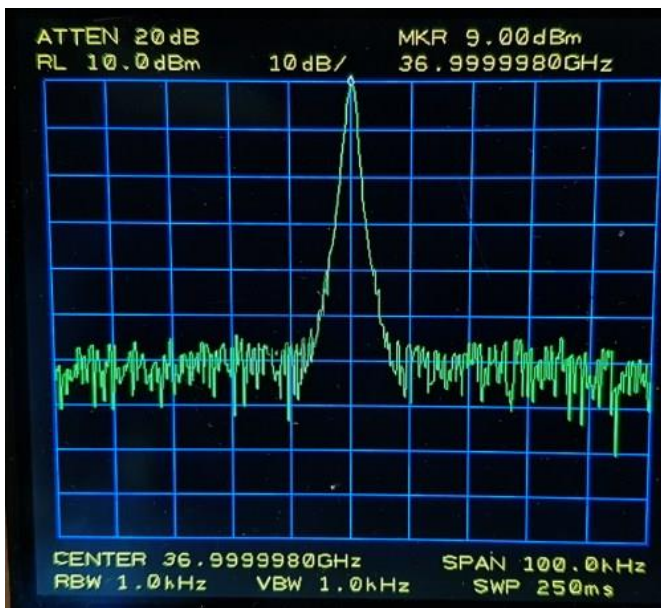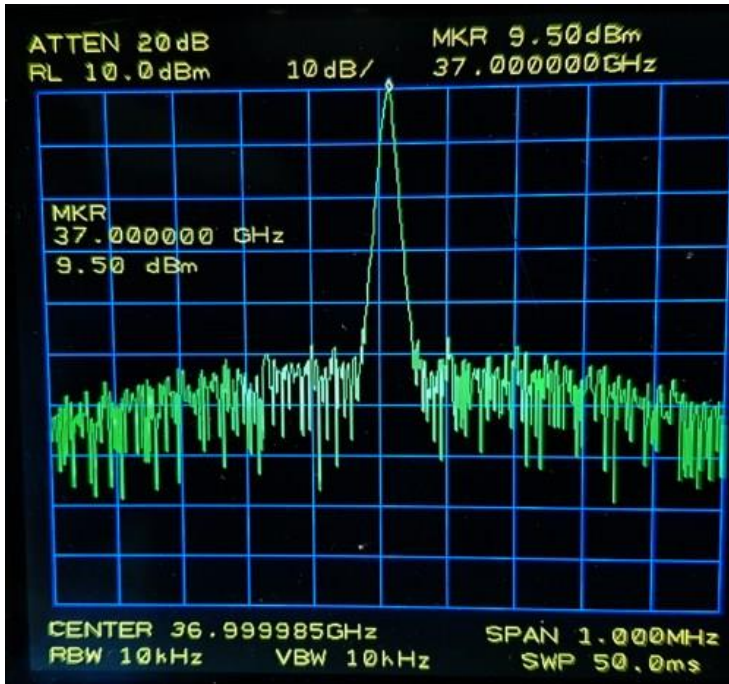

Command List (USB & Ethernet):

Command	Example 1	Example 2	Description
*IDN?			Return the SCPI identification string

*PING?	returns "PONG!" if device is responding		
SYST:ERR?			Returns any pending error codes
SYST:DBG?	Returns last debug status message		
*REV?			Return the hardware revision number
*CLS	Clears any error codes		
*RST			Reset unit now
*DISPLAY	*DISPLAY OFF	*DISPLAY ON	Power on of off the display
*BUZZER	*BUZZER ON	*BUZZER OFF	Mute the buzzer
*SLEEP	*SLEEP ON	*SLEEP OFF	Save power by putting device into sleep mode
*LAN	*LAN ON	*LAN OFF	Enable or disable the network subsystem
*SAVSTATE	Save frequency & attenuation as boot defaults		
*CLEANSTATE			Clear all settings back to factory defaults
*UNITNAME	*UNITNAME Bob	*UNITNAME DEV-34	Set a unique name in flash memory
*UNITNAME?			Return this device's name
*SYSVOLTS?	Return USB voltage input reading		

*TEMPC?			Return system temperature
POWER:READ?			Get power meter reading if hardware is available
*POWER:FCAL	*POWER:FCAL 3000MHZ		Calibrate the power meter for a different frequency
FREQ:CW	FREQ:CW 400MHZ	FREQ:CW 3.33GHZ	Set output Frequency
FREQ:CW?			Return current Frequency
FREQ:MIN?			Return minimum supported freq in Hz
FREQ:MAX?			Return max supported frequency in HZ
OUTP:STAT	OUTP:STAT ON	OUTP:STAT OFF	Turn on or off the RF output
OUTP:STAT?			Return if output is enabled
POWER	POWER 9	POWER -12.5	Set output power in dBm
POWER?			Return current output power
VERNIER	VERNIER 3	VERNIER -22	Fine tune the output power (no units)
VERNIER?			Return vernier setting
SYSREF INT			VCXO locked to internal 10MHz TCXO
SYSREF EXT			VCXO locked to an external 10MHz

SYSREF FREE	VCXO not locked to 10MHZ – lowest noise		
SYSREF AUTO			Automatic choice between internal and external
SYSREF?	Return the current source of the reference signal		
SYSREF LOCK?			Is the reference PLL locked?
SYSREF STATUS?	Returns the detected status of current reference		
SYSREF UPDATE			after a reference change this will relock the source
SYSREF OFF	disable internal 100MHz vcxo – requires external source		
SWE:MODE SCAN			Enters sweep mode & arms external sweep trigger
SWE:MODE LIST	Enters list mode & arms external trigger		
SWE:MODE?			Returns the current sweeping mode
SWE:POINTS	SWE:POINTS 10	SWE:POINTS 900	Sets sweep point count
SWE:POINTS?			Returns the current point count
SWE:DWELL	SWE:DWELL 25	SWE:DWELL 1000	Sweep dwell time in milliseconds
SWE:DWELL?			Returns the current dwell time

SWE:RESET	Return to start of list, does not clear memory		
SWE:ACTIVE?			Is the device sweeping now
FREQ:START	FREQ:START 1GHZ	FREQ:START 99MHZ	Save the sweep start frequency
FREQ:START?			Returns the start frequency
FREQ:STOP	FREQ:STOP 2GHZ	FREQ:STOP 999MHZ	Save the sweep stop frequency
FREQ:STOP?			Returns the stop frequency
LIST:DIR	LIST:DIR UP	LIST:DIR DOWN	Sweep direction
LIST:DIR?			Returns UP or DOWN
LIST:SIZE?	Returns the current size of the sweeping list		
LIST:CLEAR			
LIST:ADD	LIST:ADD 2GHz	LIST:ADD 450MHz	Add a single point to the end of the sweeping list
LIST:MAX?			Returns the MAX frequency list length
LIST?	Prints the entire frequency list		
INIT:CONT	INIT:CONT 0	INIT:CONT 1	Sweep continuous mode or single
INIT:IMM	Trigger the sweep now		

ABORT			Stop the sweep now
TRIG:STEP			Mode where trigger command only advances 1 step
TRIG:SWEEP			Trigger command will execute entire sweep (default)
COM Settings: 115200bps, 8bits, 1 stop, no parity, no flow control – Command terminator = linefeed			