




DT-8892


Hygro-Thermometer Psychrometer
Highest 2% RH accuracy with fast
response time Dual backlit display;
Large LCD display of:
Humidity/Temperature; Humidity/Dew
Point; Humidity/Wet Bulb Fast
Response time when taking a
measurement; Data Hold and Min/Max
functions Auto power off and low
battery indication




Features:
1. Fast Response Time
2. High Accuracy
3. High Performance
4. Max Hold and Data Hold Function
5. Dual Display & Backlight
6. Dew point & Wet Bulb Temperature

Specifications :		
Function	Range	Basic Accuracy(%rdg+digits)
Humidity	0°C-10%RH,	±3%RH
	90°C-100%RH	
	10°C-90%RH	±2%RH
Temperature	-30°C ~ 100°C/-22 ~ 199°F	±0.5°C/0.9°F
	-20°C ~ 60°C/-4 ~ 140°F	±2°C/4°F
Dew point Temp	-30°C ~ 100°C/-22 ~ 199°F	±0.5°C/0.9°F
Wet Bulb Temp	0°C ~ 80°C/32 ~ 176°F	±0.5°C/0.9°F

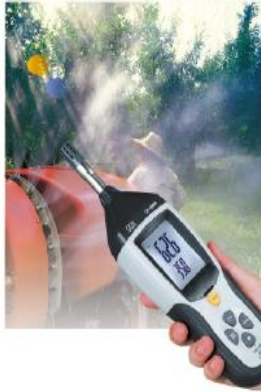




- Mixing ration/
• Temperature
- %RH, Temperature, Dew point, Wet bulb,
• absolute Humidity, Mixing ration



Hygro-Thermometer Psychrometer

- Highest 2% RH accuracy with fast response time
- Dual backlit display
- Large LCD display of: Humidity/Temperature; Humidity/Dew Point; Humidity/Wet Bulb
- Fast Response time when taking a measurement
- Data Hold and Min/Max functions
- Auto power off and low battery indication



Size(HxWxD): 255mm x 45mm x 34mm
Weight: 200g

Accessories :
 9V battery and gift box with carrying case