


DAIHAN® Internal Digital Precise Circulation Water Bath “WCB”, 6 · 11 · 22 Lit, with Certi. & Traceability

With Stainless-steel Flat Lid, Powerful Circulation Pump, up to 100°C, ±0.1°C, 5 Lit/min, 정밀 항온 순환 수조



Digital Precise Circulation Water Bath
Max. 22Lit, “WCB-22”

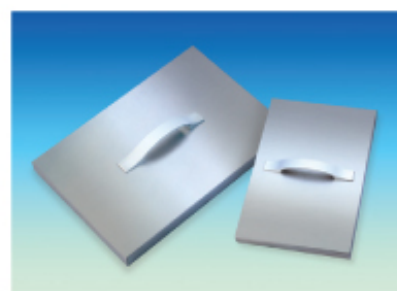

Flat Lid, Stainless-steel
(Included)

- CE Certified
- PL(Product Liability) Insurance
- with Certificate & Traceability : Controlled by Serial Number, Certificate, Delivery-information, and Traceable Data Base System
- Digital Fuzzy Control System Implementing Superior Temperature Accuracy
- Patented Jog-Shuttle Control System and Digital LCD with Back-Light Function
- * Ideal for Biotechnology, Clinical, Environmental, Medical, Petroleum, Food Industry, Pharmaceutical and Industrial Applications. * Alarm function : Error Status and Timer-end
- * Warning and Automatic Stop Function in case of Liquid Shortage.
- * Powerful Circulation Pump Assures Temp. Uniformity : Internal and External Circulation.
- * Connection with Evaporators and Viscometers is applicable.

Specifications & Ordering information

Spec.	Model	“WCB-6” Max. Capa. 6Lit	“WCB-11” Max. Capa. 11Lit	“WCB-22” Max. Capa. 22Lit
Capacity		6 Lit	11 Lit	22 Lit
Temp. Range & Accuracy		Room Temp. +5°C~ 100°C, ±0.1°C		
Temp. Resolution		0.1°C-Display, 0.1°C-Control		
Temp. Uniformity & Probe		±0.2°C, PT100		
Heating Power		800 W	1 kW	2 kW
Pump		5 Lit / min (Internal / External)		
Circulation Nozzle		id.7×od.11 mm (id.9 / od.12mm silicon tube connected for inner circulation)		
Timer & Alarm		99hr 59min (Delay & Continuous run), Error status & Timer-end		
Controller & Display		Digital Fuzzy Controller with Back Light Digital LCD		
Safety Circuit		Over-Temp./-Current protection, Sensor Error & Low Level Detection		
Material		Stainless-steel (# 304)-Internal, Powder Coated steel-External		
Drain Valve		None		Mounted(φ9.5~11mm)
Dimension (w×d×h)	Effective Space	120×155×h150 mm	170×240×h150 mm	372×295×h150 mm
	Internal	300×155×h150 mm	302×240×h150 mm	500×295×h150 mm
	External	330×185×h385 mm	335×275×h385 mm	540×335×h410 mm
Packing Size (mm) and Gross Weight (kg)		350×210×h410mm, 11 kg	360×300×h420mm, 13 kg	580×380×h470mm, 18 kg
Electrical Reqts.		1 Phase, AC 120V, 60Hz or AC 230V, 50 / 60Hz		
Cat. No.	230V	DH.WCB00106	DH.WCB00111	DH.WCB00122
	120V	DH.WCB00206	DH.WCB00211	DH.WCB00222
Price, Each. ₩				

* Other Specifications are available upon Customer's Request.

※ 운임 약 ₩ 9,000 별도!