


DAIHAN® Premium Magnetic Stirrer "MaXtir™ MS500", Shade Motor, Max. 80~1,500 rpm, Max 20Lit
 With Large LCD, Solid Ceramic Glass Plate, 200×200mm, Touch-button Controller, Digital Feedback Control, Precise Speed Control
 고성능 디지털 자력 교반기, 디지털 피드백 제어, 초강력 쉐이드 모터



Premium Digital Magnetic Stirrer "MaXtir™ MS500"

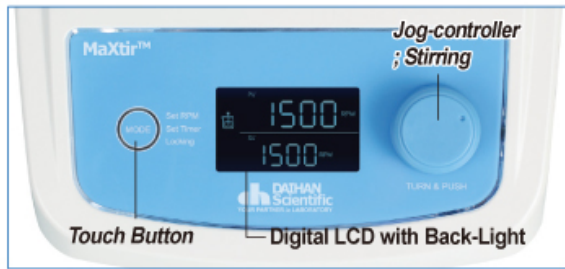

Controller of "MaXtir™ MS500"



- Ergonomic Design ■ PL(Product Liability) Insurance
- with Certificate & Traceability : Controlled by Serial Number, Certificate, Delivery-information, and Traceable Data Base System
- Digital Feedback Control by High-Performance Microprocessor
- Brushless Shade Motor & Powerful Magnet ensures Powerful Stirring and Precise Speed Control
- High-quality Solid Ceramic Glass Plate :
 Heat · Chemical · Acid-Resistance and Easy to Clean
- * Large LCD Display for Current and Speed, and Timer
- * Patented Controller "Jog-Dial" and Main Touch Button - Best Durability, Best Mobility, Best Convenient to Operate.
- * Mixing for Chemical, Laboratory, Pharmaceutical Materials
- * Storage Function for the set Values : RPM and Timer
- * Minimization of Noise and Improved the Product Life
- * Use of the Special Advanced Insulation for the safety of the Body Temp.
- * Locking Mode Supported for Experimental Safety (Input to Jog-Dial can be Disabled)
- * Digital Timer Function(99hr 59min)
- * Ergonomic Design of Body made by Aluminum Die-casting

Specifications & Ordering information

Spec.		Model	"MaXtir™ MS500"
Material	Body		Powder Coated Aluminum
	Plate		Solid Ceramic Glass Plate, 200×200mm
Stirring Capa.			Max. 20 Lit
Speed & Control Resolution			80 ~ 1,500 rpm, 5 rpm
Timer & Alarm			99hr 59min (with Continuous run.), Error status & Timer-end
Display			Large Digital LCD with Back-Light Function
Controller			Digital Feedback Controller with Jog Dial (Turn+Push) and Touch button.
Stirring Bar			3cm bar-included, Usable : up to 5cm bar
Permissible Temp. & RH %			Room Temp. +5 ~ 50℃, 85% RH
Dimension & Weight			200×332×h114mm, 3.8kg
Electrical Reqts.			1 Phase, AC 120 V, 60 Hz or AC 230 V, 50 / 60 Hz
Cat. No.	230V		DH.WMS00500
	120V		DH.WMS00501
Price, Each. ₩			

* Other Specifications are available upon Customer's Request.

Optional Stand Rod/Holder/Clamp/Clip

- DH.WHP503036 (1) Stand Rod, "RD200", Stainless-steel, screw, $\phi 12 \times L450$ mm
 DH.WHP503012 (2) Holder/Clamp/Clip, "CL220", for Temp. Probe