


DAIHAN® Digital Precise Viscosity Bath "WVB", Useful 5 × Viscometer, Max. 30Lit/min, up to 100℃, ±0.1℃
 With 5 Holes Stainless-steel Lid for Viscometer Holder, Available Reverse & Routine-type Viscometer, Transparent Window
 투시형 정밀 점도 항온수조, 5× 점도계 사용가능, 디지털 퍼지 제어 시스템, 5-구 스텐리스 스틸 리드포함



Max. 30Lit/min Viscosity Bath "WVB-30",
 included Flat Lid for Viscometer Holder
 (without Viscometer Holder)



Flat Lid with Viscometer Holder

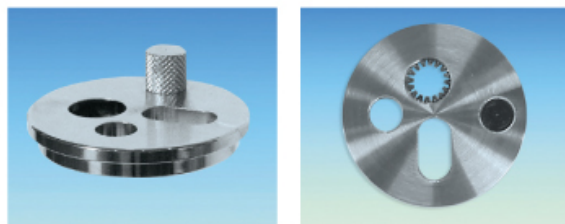

(1) Viscometer Holder "WVB02010" (Optional)

- CE Certified ■ PL (Product Liability) Insurance
- with Certificate & Traceability : Controlled by Serial Number, Certificate, Delivery-information, and Traceable Data Base System
- Used for Precise Measurement with Capillary Viscometers
- Digital Fuzzy Control System Implementing Superior Temperature Accuracy
- Powerful Circulation Pump ensures Highest Uniformity of Temperature
- Viscometer Holder : Available Reverse & Routine-type Viscometer
- Patented Jog-Shuttle Control System and Digital LCD with Back-Light Function.
- * Stainless-steel(#304) made inner bath
- * Stainless-steel Lid Contains Five Holes for Insertion of Viscometer Holders
- * User's Self-compensation Function to Control Difference between Real Temperature and Indicated Temperature
- * Storage Function for the Set Values of Temperature and Time
- * Locking Mode Supported for Experimental Safety (Input to Jog-Shuttle can be Disabled)
- * Included Flat Lid for Viscometer(without Viscometer Holder)
- * Over Temp., Over Current Protection and Sensor Error Detection
- * Digital Timer Function : 'Delay Time' and 'Operation Time' : Can be Controlled

Specifications & Ordering information

| Spec. | Model | "WVB-30" Max. Flow 30Lit/min |
|---------------------------------------|----------------------|--|
| Range & Accuracy | | Room Temp. +5℃ to 100℃, ±0.1℃ |
| Temp. Resolution | | 0.1℃-Display, 0.1℃-Control |
| Temp. Uniformity & Probe | | ±0.2℃, PT100 |
| Heating Power | | 2 kW |
| Pump | | Magnetic Drive, Max. Flow 30 Lit/min |
| Timer & Alarm | | 99hr 59min (Delay & Continuous run), Error status & Timer-end |
| Display | | Digital LCD with Back-Light Function |
| Controller | | Digital Fuzzy Controller with Jog-Shuttle Switch (Turn+Push) |
| Safety Circuit | | Over-Temp./-Current protection, Sensor Error Detection |
| Lid | | Included 5 Holes Stainless-steel Lid for Viscometer Holder |
| Drain Valve | | Mounted |
| Viewing Window Size(mm) | | 230×180 |
| Material | | Stainless-steel (#304)-Internal, Powder Coated steel-External, Vacuum Sealed and Tempered Safety Pair Glasses-Window |
| Dimension (w×d×h) | Effective Space (mm) | 330×300×h260 mm |
| | Internal (mm) | 350×300×h300 mm |
| | External (mm) | 585×375×h420 mm |
| Packing Size (mm) & Gross Weight (kg) | | 640×450×h500 mm, 24 kg |
| Electric Reqtqs. | | 1 Phase, AC 120V, 60Hz or 230V, 50 / 60Hz |

| | | |
|----------------|------|-------------|
| Cat. No. | 230V | DH.WVB01030 |
| | 120V | DH.WVB02030 |
| Price, Each. ₩ | | |

* Other Specifications are available upon Customer's Request. ※ 운임 약 ₩ 16,000 별도!

Spare Stainless-steel Flat Lid for Viscometer Holder

| | | |
|-------------|--|--------------|
| DH.WVB11030 | Flat Lid, for 30 Lit, w380×d330, 5×φ50mm Holes, "VBF030" | Ea. Price, ₩ |
|-------------|--|--------------|

Optional Viscometer Holder

| | | |
|-------------|--|--------------|
| DH.WVB02010 | (1) Viscometer Holder, "WVB02010" for SI Analytics® Ostwald, Ubbelohde | Ea. Price, ₩ |
| DH.WVB02011 | Viscometer Holder, "WVB02011" for SI Analytics® Cannon-Fenske, Witeg® Ubbelohde, Cannon-Fenske | |
| DH.WVB02012 | Viscometer Holder, "WVB02012" for Thread-type Ubbelohde | |

Viscosity Bath Validation (IQ, OQ) Service

| | | |
|-------------|---|--------------|
| DH.WVB31030 | Validation Service(IQ, OQ), with "WVB-30", "VBF030" | Ea. Price, ₩ |
|-------------|---|--------------|