


494

Smoke Absorbing System



- Soldering smoke absorber for production-line use that enables the exhausting of fumes to an outdoor location
- Equipped with a suppressor to reduce exhaust noise during operation
- Up to 10 soldering irons can be connected to one unit

Example of Connections

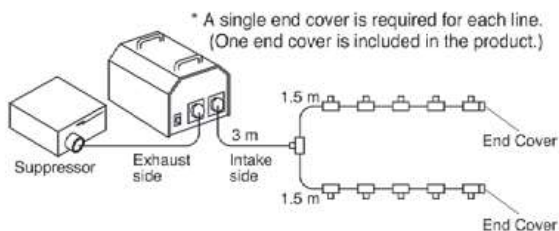

Packing List

494	Unit, Filter case, Filter cap, Pre-filter (5 pcs), Duct (3 m), End cover, Main filter (5 pcs), Inlet socket, Exhaust duct (5 m), Nylon strap, Suppressor, Absorption pipe set, Instruction manual
------------	---

*When ordering HAKKO 494, specify the part number of the absorption pipe set.

Option

Part No.	Name	Specifications
C1540	Absorption pipe set <R>	Any with a handle ø16 mm or smaller
B1246	Parallel piping joint	-

Specifications

Model No.	494
Power consumption	50 Hz: 150 W 60 Hz: 200 W
Noise level*	With hose: 55 dB Without hose: 71 dB
Suction capacity	50 Hz: 1.56 m ³ /min. 60 Hz: 1.82 m ³ /min.
Static pressure	50 Hz: 2.3 kPa (240 mmAq.) 60 Hz: 3.2 kPa (325 mmAq.)
Dimensions**	322 (W) × 300 (H) × 386 (D) mm
Weight***	18 kg

* Measured at a distance of 1 m from the face of the unit.

** Without handle and cord

*** Unit only