



**PRODUCT**

**CATEGORIES**

- [Electronic Universal Testing Mach...](#)
- [Hydraulic Universal Testing Machi...](#)
- [Compression Tester \(http://www.h...](http://www.h...)
- [Impact Testing Machine \(http://w...](http://w...)
- [High And Low Temperature Cha...](#)
- [Specimen Making Machine \(http://...](http://...)
- [Torsion Testing Machine \(http://w...](http://w...)
- [Fatigue Testing Machine \(http://w...](http://w...)
- [Other testing machine \(http://www...](http://www...)
- [Bending Testing Machine \(http://w...](http://w...)
- [Optical cable testing machine \(htt...](htt...)
- [Spring Testing Machine \(http://ww...](http://ww...)
- [Metallographic Equipment \(http://...](http://...)
- [Hardness Tester \(http://www.hssd...](http://www.hssd...)
- [NDT Series \(http://www.hssdgrou...](http://www.hssdgrou...)

**MESSAGE BOARD**


Full name

Phone

E-mail

Message

SEND

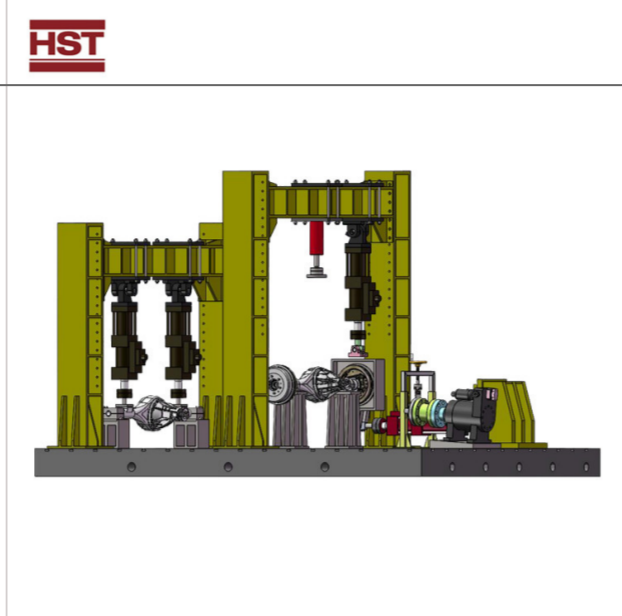

**Hstplw-1000 electro-hydraulic servo trailer suspension test system**

**Product description:**

Electro-hydraulic servo HSTPLW - 1000 trailer suspension test system used to carry out the trailer suspension assembly and key parts and components, such as suspension, rear axle in the former, leaf s



(<http://www.hssdgroup.com/PRODUCT/NDT-Series/425.html>)

Share With:

We're here to help:  
 Easy ways to get the answers you need.

Send E-mail (<mailto:Louis@hssdtest.com>)      Chat Now ([skype:sales02@hssdtest.com?chat](http://www.hssdgroup.com/PRODUCT/NDT-Series/425.html))

[PRODUCT DETAILS](#)    [PRODUCT VIDEO](#)

Electro-hydraulic servo HSTPLW - 1000 trailer suspension test system used to carry out the trailer suspension assembly and key parts and components, such as suspension, rear axle in the former, leaf spring, trailer axle, traction pin and traction products such as dynamic and static mechanical properties test

**Main technical parameters :**

No.	Inspection item	Technical requirements
1	1000kN Maximum static test force of actuator	±1000kN
2	250kN Maximum static test force of actuator	±250kN
3	150kN Maximum static test force of actuator	±150kN
4	The precision range of static test force indicator	2%-100%FS
5	Static test force value precision	≤±1%
6	1000kN The maximum amplitude of the actuator	±150mm
7	250kN The maximum amplitude of the actuator	±125mm
8	150kN The maximum amplitude of the actuator	±125mm
9	Precision of amplitude indicator	From 20% ≤±0.5%FS
10	Controller frequency range	0.01 - 30Hz
11	Main test waveform	Sine wave, triangle wave, square wave, half sine wave, half triangle wave, half square wave, oblique wave and user-defined wave, etc
12	Control mode	Force or displacement control
13	Pump specifications	3*200L/min,21MPa, 3*90kW,AC ( three-phase supply ) , 380V
14	Grease separator	800L/min+2*400L/min , 21PMa
15	General technical requirements for testing machines	GB/T2611-2007

Choose language ▼

Call Us Now: **+86-15910081986**

Call Us Now: **Louis@hssdtest.com** (mailto:

(<https://www.facebook.com/Testing-machine-1867923476851664/>)

[Louis@hssdtest.com?subject=](mailto:Louis@hssdtest.com?subject=))



(/)

---