


dial comparator
is optional

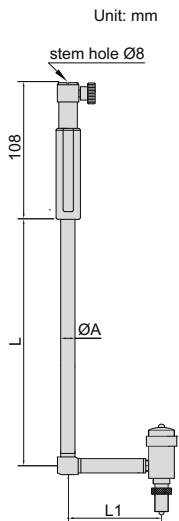

2443-150

- Carbide contact points
- Optional accessory:
 - 0.01mm or 0.001mm graduation dial indicator or dial comparator
 - Setting ring (code **6312**)
 - Long handle (code **7352**)
 - Bore gage setter

						(mm)
Code	Range	Accuracy (without dial comparator)	Repeatability (without dial comparator)	ØA	L	L1
2443-6*	4.5-6mm	4µm	1µm	4	80	30
2443-8*	6-8mm	4µm	1µm	5	100	30
2443-12*	8-12mm	4µm	1µm	5	100	30
2443-20*	12-20mm	4µm	1µm	8	110	52
2443-35*	18-35mm	4µm	1µm	8	110	52
2443-60*	35-60mm	4µm	1µm	12	177	62
2443-100*	50-100mm	4µm	1µm	12	177	62
2443-150*	50-150mm	4µm	1µm	12	177	62
2443-160*	100-160mm	4µm	1µm	18	234	75
2443-230*	100-230mm	4µm	1µm	18	234	75
2443-290*	160-290mm	4µm	1µm	18	234	75
2443-360*	160-360mm	4µm	1µm	18	234	75
2443-410*	280-410mm	5µm	2.5µm	24	400	80
2443-510*	280-510mm	5µm	2.5µm	24	400	80
2443-800*	400-800mm	5µm	2.5µm	24	400	80

* Supplied with manufacturer inspection certificate traceable to NIST USA