



- Location :
- [Home](#)
- > [Product](#)
- > [Mechanical experimental equipment](#)
- > [Impact testing machine](#)



Pendulum impact testing machine L-JZ01


Release date : 2020-06-03

- ---

-
-

Details

试样类型	长度 L	宽度 b	厚度 d	支撑线间距离
1	80 ± 2	10 ± 0.5	4 ± 0.2	60/62
2	50 ± 1	6 ± 0.2	4 ± 0.2	40
3	120 ± 2	15 ± 0.5	10 ± 0.5	70
4	120 ± 2	13 ± 0.5	13 ± 0.5	95

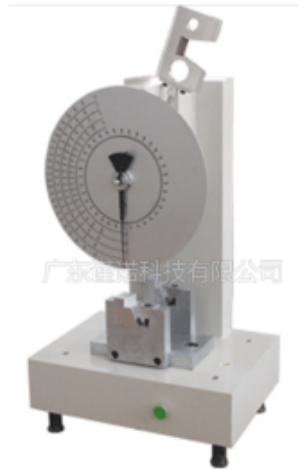

1. 简支梁冲击试验机用途简介

XM-JZ01 简支梁冲击试验机 用于测定硬质塑料、纤维增强复合材料、尼龙、玻璃钢、陶瓷、铸石、塑料电器绝缘材料等非金属材料的冲击韧性。是科研机构、大专院校、有关厂矿进行质量检验的常用设备。

2. 简支梁冲击试验机适用标准

XM-JZ01 简支梁冲击试验机 符合 ISO179、GB/T1043、JB/T8762 等标准

3. 简支梁冲击试验机主要参数

- 01、摆锤能量：0.5J 1J 2J 4J 5J
- 02、摆锤力距：1J 摆锤 PL=0.516Nm、2J 摆锤 PL=1.031Nm、4J 摆锤 PL=2.062Nm、5J 摆锤 PL=2.578Nm
- 03、标度盘最小分度值：1/100
- 04、冲击速度：2.9 m/s
- 05、摆轴中心到试样中心距离：221mm
- 06、钳口圆角半径：1mm
- 07、冲击刀刃夹角：30°
- 08、冲击刀刃圆角半径：2mm
- 09、机底座质量大于所用最重摆锤 40 倍且可调水平
- 10、电源电压：220V
- 11、试样类型、尺寸、支撑线间距离如下表：

Recommended



Automatic tool metallographic measuring instrument V400



Automatic tool metallographic measuring instrument V800

•




Automatic tool metallographic measuring instrument V1800

•



Automatic tool metallographic measuring instrument V2000



GUANGDONG JINUOSH TECHNOLOGY CO., LTD

Building 28, Guanghui Industrial Zone, Dongke Road, Dongcheng District, Dongguan City,
Guangdong Province 0769-2282-0867

•

•

•

•

•

GUANGDONG JINUOSH TECHNOLOGY CO., LTD All rights reserved Company address: Building 28,
Guanghui Industrial Zone, Dongke Road, Dongcheng District, Dongguan City, Guangdong
Province Service Hotline: 188-9871-9887 0769-22820867