

## N6200 Series Wide Range Medium Power DC Electronic Load



### Product Introduction

N6200 series is a programmable DC electronic load with high accuracy, high reliability and high cost performance. It supports local control via screen&button and remote control on PC. It is with built-in LAN port and RS232 interface. N6200 series is designed in a 19 inch 2U chassis, which is available for benchtop use or installation in 19 inch rack.

### Application Fields

Medium power supplies, battery packs, electric tools, BMS, supercapacitors, etc.

### Main Features

- ▶ Power range: 0-600W/0-1200W/0-1800W
- ▶ Voltage range: 0-60V/0-150V/0-600V
- ▶ Current range: 0-50A/0-100A/0-150A
- ▶ Operation mode: CC, CV, CP, CR
- ▶ Stable and reliable CR/CP function supported by hardware
- ▶ Editable rise and fall slew rate
- ▶ Programmable sequence test function(SEQ), up to 100 groups sequence files, up to 50 steps per file
- ▶ Analog programming interface(APG), current monitoring interface, remote/local trigger function
- ▶ Built-in ESR test function (Optional)
- ▶ Supporting LAN/RS232 communication and SCPI commands
- ▶ Supporting charge & discharge test, OCP test
- ▶ Editable Von/Voff function
- ▶ Standard 19-inch 2U, available for rack installation
- ▶ Short-circuit simulation


### Adjustable CV loop feedback speed

Different voltage response speeds are required in different power applications. When the electronic load does not match with the power supply in response speed, it will cause parameter fluctuation, reduce the measuring accuracy, and even cause numerical oscillation and unsuccessful test.

On both LCD and application software, N6200 provides three options for voltage response speed: high, medium and low, which can match various power supplies. It can not only improve the test efficiency but also reduce the cost of equipment, time and expenses.



▲ Common Load Performance-Self-excitation

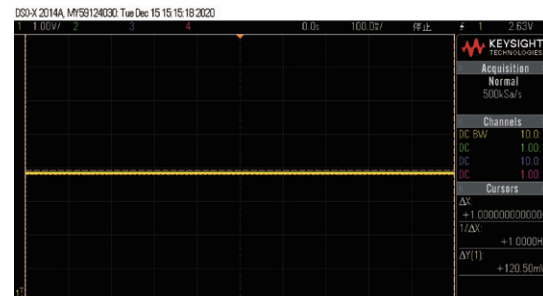

▲ NGI Load Performance-Stable Waveform

### Equivalent Series Resistance( ESR) test (Optional)


ESR is a principal parameter of battery or supercapacitor. N6200 series offers professional ESR measurement function, which can support multiple measurement standards, and possess the advantages of accurate results and stable repeated results.

The ESR measurement function absorbs current from the DUT under CC mode. When the current changes, the NGI internal resistance sensing circuit can accurately capture the voltage drop of DUT and calculate ESR value.

### CR/CP function supported by hardware


NGI CP circuit has fast response and high accuracy. Compared with CP function by software, it works more stably and reliably without causing power peak or self-excitation due to voltage transient.

NGI CR circuit can improve the speed and stability of the control loop and prevent the loop from self-excitation, without participation of software for calculation.

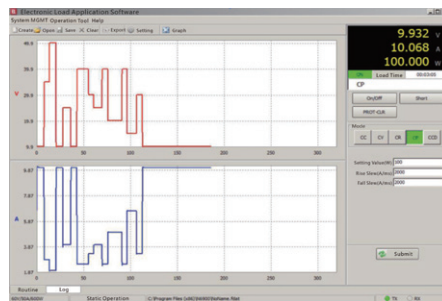

▲ CP by Hardware with Fast Response

### Product Dimension

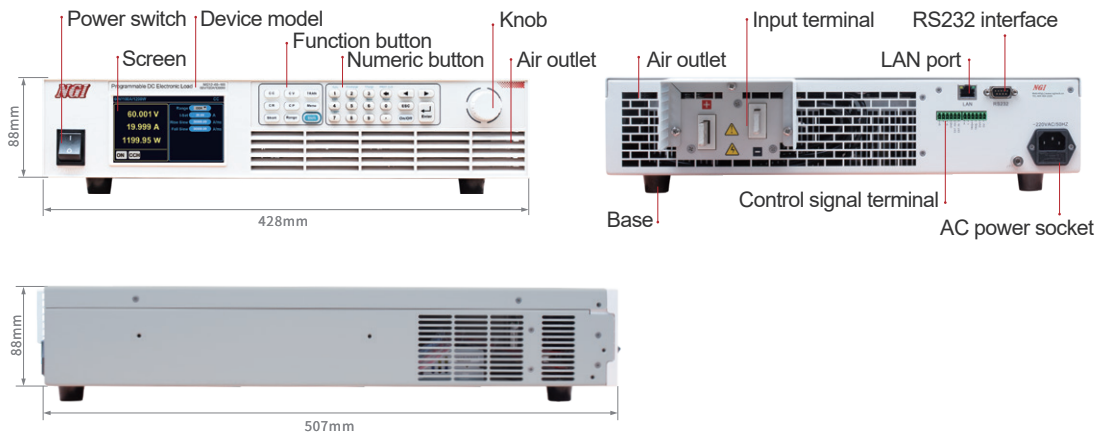

## Technical Data Sheet(1)

Model	N6206-60-10		N6206-60-50		N6206-150-50		N6206-600-10	
Voltage	60V		60V		150V		600V	
Current	10A		50A		50A		10A	
Power	600W							
Min. Operating Voltage	2V@10A		2V@50A		2V@50A		4.5V@10A	
CC Mode								
Range	0~1A	0~10A	0~5A	0~50A	0~5A	0~50A	0~1A	0~10A
Setting Resolution	0.1mA	1mA	0.1mA	1mA	0.1mA	1mA	0.1mA	1mA
Setting Accuracy (23±5°C)	Low range:0.1%+0.1%F.S., High range:0.1%+0.15%F.S.							
CV Mode								
Range	0~6V	0~60V	0~6V	0~60V	0~15V	0~150V	0~60V	0~600V
Setting Resolution	0.1mV	1mV	0.1mV	1mV	1mV	10mV	1mV	10mV
Setting Accuracy (23±5°C)	0.05%+0.1%F.S.							
CP Mode								
Range	0~600W							
Setting Resolution	10mW							
Setting Accuracy (23±5°C)	0.5%+1%F.S.							
CR Mode								
Range	0.12 ~ 600Ω	2.3Ω~6000Ω	0.03 ~ 120Ω	0.5Ω~1200Ω	0.06Ω~300Ω	1.2Ω~3000Ω	1.12Ω~6000Ω	22.4Ω~60000Ω
Setting Resolution	16bits							
Setting Accuracy (23±5°C)	0.35%+5.2mS	0.35%+0.52mS	0.35%+26.04mS	0.35%+2.6mS	0.35%+10.41mS	0.35%+1.04mS	0.35%+0.52mS	0.35%+0.05mS
Slew Rate								
Current	0.1~10A/ms	10~500A/ms	0.8~50A/ms	50~2500A/ms	0.8~50A/ms	50~2500A/ms	0.1~10A/ms	10~500A/ms
Voltage	0.5~25V/ms	25~250V/ms	0.5~25V/ms	25~250V/ms	10~60V/ms	60~600V/ms	5.0~250V/ms	250~2500V/ms
Power	0.1~10A/ms	10~500A/ms	0.8~50A/ms	50~2500A/ms	0.8~50A/ms	50~2500A/ms	0.1~10A/ms	10~500A/ms
Resistance	0.1~10A/ms	10~500A/ms	0.8~50A/ms	50~2500A/ms	0.8~50A/ms	50~2500A/ms	0.1~10A/ms	10~500A/ms
Accuracy (23±5°C)	(1±35%)*Setting value							
Voltage Measurement								
Range	0~6V	0~60V	0~6V	0~60V	0~15V	0~150V	0~60V	0~600V
Readback Accuracy (23±5°C)	0.05%+0.05%F.S.							
Current Measurement								
Range	0~1A	0~10A	0~5A	0~50A	0~5A	0~50A	0~1A	0~10A
Readback Accuracy (23±5°C)	0.1%+0.1%F.S.							
Power Measurement								
Range	0~600W							
Readback Accuracy (23±5°C)	0.5%+1%F.S.							
Dynamic Mode								
T1&T2	1~60000ms							
Resolution	1ms							
Accuracy (23±5°C)	1ms+100ppm							
Others								
Interface	LAN/RS232							
AC Input	Single phase, 220V AC±10%, frequency 47Hz~63Hz							
Sampling Frequency	25Hz							
Communication Response Time	≤10ms							
Temperature	Operating temperature: 0°C~40°C, storage temperature: -20°C~60°C							
Operating Environment	Altitude <2000m, relative humidity: 5%~90%RH(non-condensing), atmospheric pressure: 80~110kPa							
Net Weight	Approx. 13kg							
Dimension	2U, 88.0(H)*482.0(W)with handle*507.0(D)mm							

Note 1: For other specifications, please contact NGI.

Note 2: All specifications are subject to change without notice.

**Technical Data Sheet(2)**

Model	N6212-60-100		N6212-150-100		N6212-600-20	
Voltage	60V		150V		600V	
Current	100A		100A		20A	
Power	1200W					
Min. Operating Voltage	2V@100A		2V@100A		4.5V@20A	
CC Mode						
Range	0~10A	0~100A	0~10A	0~100A	0~2A	0~20A
Setting Resolution	1mA		10mA		0.1mA	
Setting Accuracy (23±5°C)	Low range:0.1%+0.1%F.S., High range:0.1%+0.15%F.S.					
CV Mode						
Range	0~6V	0~60V	0~15V	0~150V	0~60V	0~600V
Setting Resolution	0.1mV		1mV		10mV	
Setting Accuracy (23±5°C)	0.05%+0.1%F.S.					
CP Mode						
Range	0~1200W					
Setting Resolution	10mW					
Setting Accuracy (23±5°C)	0.5%+1%F.S.					
CR Mode						
Range	0.02~60Ω	0.3Ω~600Ω	0.03Ω~150Ω	0.6Ω~1500Ω	0.56Ω~3000Ω	11.2Ω~30000Ω
Setting Resolution	16bits					
Setting Accuracy (23±5°C)	0.35%+52mS	0.35%+5.2mS	0.35%+20.8mS	0.35%+2.08mS	0.35%+1mS	0.35%+0.1mS
Slew Rate						
Current	1.6~100A/ms	100~5000A/ms	1.6~100A/ms	100~5000A/ms	0.3~20A/ms	20~1000A/ms
Voltage	0.5~25V/ms	25~250V/ms	10~60V/ms	60~600V/ms	5.0~250V/ms	250~2500V/ms
Power	1.6~100A/ms	100~5000A/ms	1.6~100A/ms	100~5000A/ms	0.3~20A/ms	20~1000A/ms
Resistance	1.6~100A/ms	100~5000A/ms	1.6~100A/ms	100~5000A/ms	0.3~20A/ms	20~1000A/ms
Accuracy (23±5°C)	(1±35%)*Setting value					
Voltage Measurement						
Range	0~6V	0~60V	0~15V	0~150V	0~60V	0~600V
Readback Accuracy (23±5°C)	0.05%+0.05%F.S.					
Current Measurement						
Range	0~10A	0~100A	0~10A	0~100A	0~2A	0~20A
Readback Accuracy (23±5°C)	0.05%+0.1%F.S.					
Power Measurement						
Range	0~1200W					
Readback Accuracy (23±5°C)	0.5%+1%F.S.					
Dynamic Mode						
T1&T2	1~60000ms					
Resolution	1ms					
Accuracy (23±5°C)	1ms+100ppm					
Others						
Interface	LAN/RS232					
AC Input	Single phase, 220V AC±10%, frequency 47Hz~63Hz					
Sampling Frequency	25Hz					
Communication Response Time	≤10ms					
Temperature	Operating temperature: 0°C~40°C, storage temperature: -20°C~60°C					
Operating Environment	Altitude <2000m, relative humidity: 5%~90%RH(non-condensing), atmospheric pressure: 80~110kPa					
Net Weight	Approx. 14.5kg					
Dimension	2U, 88.0(H)*482.0(W)with handle*507.0(D)mm					

Note 1: For other specifications, please contact NGI.

Note 2: All specifications are subject to change without notice.

### Technical Data Sheet(3)

Model	N6218-60-150		N6218-150-150		N6218-600-30	
Voltage	60V		150V		600V	
Current	150A		150A		30A	
Power	1800W					
Min. Operating Voltage	2V@150A		2V@150A		4.5V@30A	
CC Mode						
Range	0~15A	0~150A	0~15A	0~150A	0~3A	0~30A
Setting Resolution	1mA	10mA	1mA	10mA	0.1mA	1mA
Setting Accuracy (23±5°C)	Low range:0.1%+0.1%F.S., High range:0.1%+0.15%F.S.					
CV Mode						
Range	0~6V	0~60V	0~15V	0~150V	0~60V	0~600V
Setting Resolution	0.1mV	1mV	1mV	10mV	1mV	10mV
Setting Accuracy (23±5°C)	0.05%+0.1%F.S.					
CP Mode						
Range	0~1800W					
Setting Resolution	10mW					
Setting Accuracy (23±5°C)	0.5%+1%F.S.					
CR Mode						
Range	0.01 ~ 40Ω	0.2Ω~400Ω	0.02Ω~100Ω	0.4Ω~1000Ω	0.38Ω~2000Ω	7.5Ω~20000Ω
Setting Resolution	16bits					
Setting Accuracy (23±5°C)	0.35%+78.12mS	0.35%+7.8mS	0.35%+31.25mS	0.35%+3.1mS	0.35%+1.56mS	0.35%+0.1mS
Slew Rate						
Current	2.5~150A/ms	150~7500A/ms	2.5~150A/ms	150~7500A/ms	0.5~30A/ms	30~1500A/ms
Voltage	0.5~25V/ms	25~250V/ms	10~60V/ms	60~600V/ms	5.0~250V/ms	250~2500V/ms
Power	2.5~150A/ms	150~7500A/ms	2.5~150A/ms	150~7500A/ms	0.5~30A/ms	30~1500A/ms
Resistance	2.5~150A/ms	150~7500A/ms	2.5~150A/ms	150~7500A/ms	0.5~30A/ms	30~1500A/ms
Accuracy (23±5°C)	(1±35%)*Setting value					
Voltage Measurement						
Range	0~6V	0~60V	0~15V	0~150V	0~60V	0~600V
Readback Accuracy (23±5°C)	0.05%+0.05%F.S.					
Current Measurement						
Range	0~15A	0~150A	0~15A	0~150A	0~3A	0~30A
Readback Accuracy (23±5°C)	0.05%+0.1%F.S.					
Power Measurement						
Range	0~1800W					
Readback Accuracy (23±5°C)	0.5%+1%F.S.					
Dynamic Mode						
T1&T2	1~60000ms					
Resolution	1ms					
Accuracy (23±5°C)	1ms+100ppm					
Others						
Interface	LAN/RS232					
AC Input	Single phase, 220V AC±10%, frequency 47Hz~63Hz					
Sampling Frequency	25Hz					
Communication Response Time	≤10ms					
Temperature	Operating temperature: 0°C~40°C, storage temperature: -20°C~60°C					
Operating Environment	Altitude <2000m, relative humidity: 5%~90%RH(non-condensing), atmospheric pressure: 80~110kPa					
Net Weight	Approx. 16kg					
Dimension	2U, 88.0(H)*482.0(W)with handle*507.0(D)mm					

Note 1: For other specifications, please contact NGI.

Note 2: All specifications are subject to change without notice.