


AFP1 MEASURING INSTRUMENT

HVAC MEASUREMENTS SMART AND SIMPLE

AIR SPEED MEASUREMENT MADE EASY

- Intelligent multi-parameter measuring instrument for air velocity, humidity and temperature
- Small vane anemometer for in-tube measurements
- Smart phone connection via *Bluetooth*[®]
- Easy data logging via iOS or Android app
- Direct volume flow calculation
- Numeric or graphic display
- Simple data export for evaluation on a PC



TECHNICAL INFORMATION

The intelligent AFP1 multi-parameter measuring instrument is ideal for spot measurements in HVAC systems. Thanks to easy operation via a smart phone, it is possible not only to take random measurements, but also to record, export and display data as wanted.


Operation with "ROTRONIC" App

The AFP1 sensor is operated via Bluetooth communication with the ROTRONIC smart phone app, which can be obtained free-of-charge from the App Store (iOS) or Play Store (Android).

The app offers functions to display, log and send the required measured values by e-mail. It is also possible, among others, to define parameter-specific settings and options for the measurement.



Dimensions (in mm)

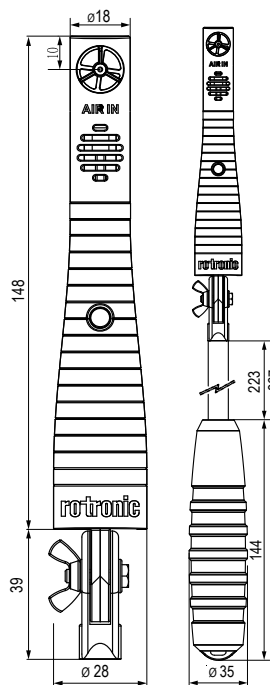

| General | |
|---------------------------------|---|
| Parameters | - Air velocity - Humidity - Temperature |
| Air velocity sensor | Vane anemometer |
| Humidity sensor | ROTRONIC HYGROMER® IN-1 |
| Temperature sensor | NTC |
| Measurement range | 0.5...20 m/s 0...100 %RH -20...60°C |
| Accuracy | ±(3 % of measured value + 0.2 m/s) ±3 %RH (at 25 °C) ±0.6 K (at -20...50 °C) |
| Logging interval | 1 s |
| Communication | Bluetooth® |
| LED | 1 two-colored LED (red/green) Red: Battery power too low for proper operation Green: Battery and communication normal |
| Power supply | 2 x 3 V CR2032 batteries |
| Current consumption | < 5.3 mA |
| Dimensions measurement probe | 150 x ø 18 / 28 mm |
| Dimensions incl. telescopic rod | Retracted: 0.55 m Extended: 1.2 m |
| Weight | Measurement probe: 62 g Telescopic rod: 178 g |
| Software | App "ROTRONIC" (iOS, Android) |
| Delivery package | - Factory certificate - Short instruction manual - APP (online) - Batteries 2 x 3 V (CR2032) - Soft case |

Subject to technical change without notice. Printing and other errors reserved.

Would you like more information? You can find a complete overview of the AFP1 at www.rotronic.com

MEASUREMENT SOLUTIONS

ROTRONIC AG, Grindelstrasse 6, CH - 8303 Bassersdorf, Tel. +41 44 838 11 44, www.rotronic.ch
 ROTRONIC Instruments (UK) Ltd, Crompton Fields, Crompton Way, Crawley, West Sussex, RH10 9EE, UK, Phone +44 (0)1293 571000, www.rotronic.co.uk
 ROTRONIC Instrument Corp, 135 Engineers Road, Hauppauge, NY 11788, USA , Phone, +1 631 427-3898, www.rotronic-usa.com
 ROTRONIC Canada Inc., 236 Pritchard Rd, Unit 204, Hamilton, ON, Canada , L8W 3P7, Phone + 1 905 754-5164, www.rotronic.ca
 ROTRONIC Instruments Pte. Ltd., 1003 Bukit Merah Central, 006-31 Inno Centre, Singapore 159836, Phone +65 6376 2107, www.rotronic.sg