

## Product Informations

Our Product Lineup

### HDC-AC with built-in high-voltage power supply






Slim and light-weght  
designed Desktop Ionizer

Static eliminator blower  
**WINSTAT BF-X2ME**

Outline view [↗](#)

Specification [↗](#)

• about Icons




#### Feature of the product


Compact Air Ionizer WINSTAT B F -X 2ME is s lim and light-weght designed desktop ionizer with featuring SSD high technology HDCAC that has long term and stable static elimination capabilities.

- With SSD high technology HDC-AC(Hybrid Digital controlled AC), it performs as less particle attach and long term stability performance.
- Easy maintenance with detachable louver and Emitter needle unit.
- Less maintenance structure designed.
- Safety operation with minute discharge detection and over current detection.
- Wide or straight ionization with two kinds louver part.
- Angle locked function keeps fixed angle direction.



#### Options

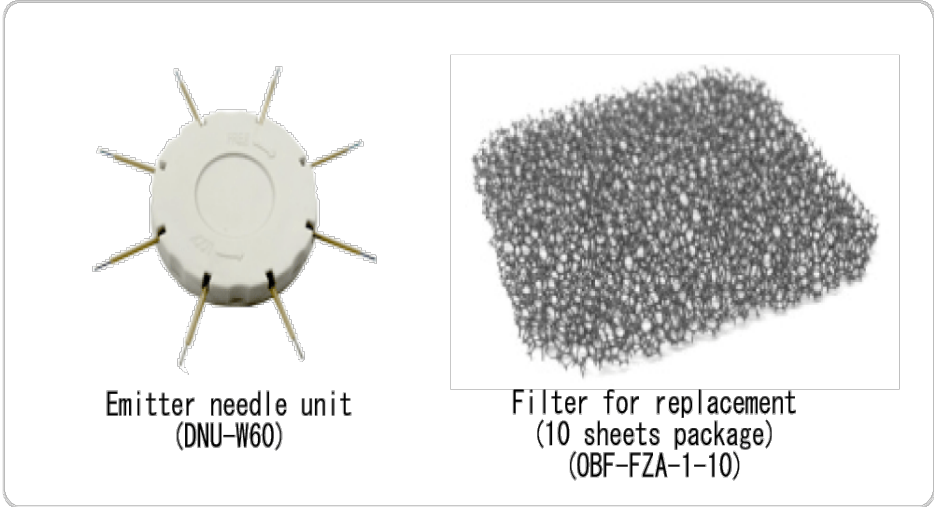

**Indicator Panel**

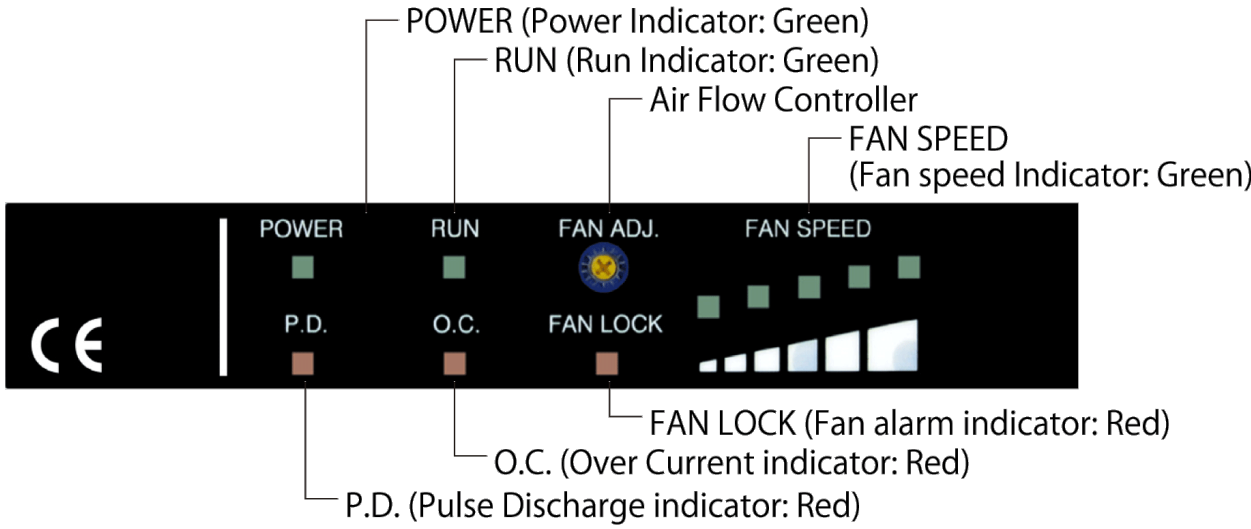

**louver panel static elimination features and static elimination area**

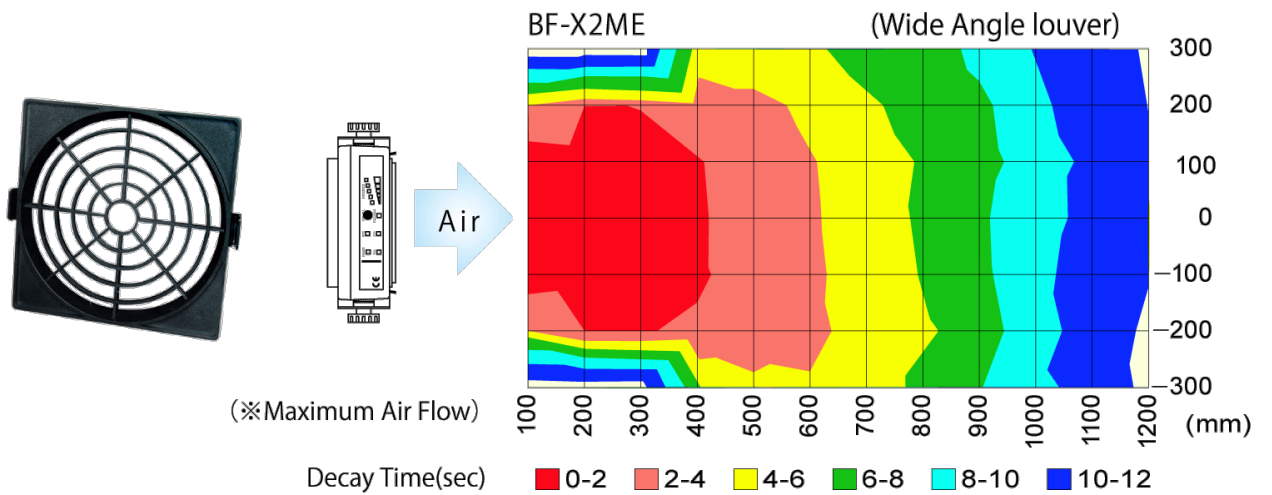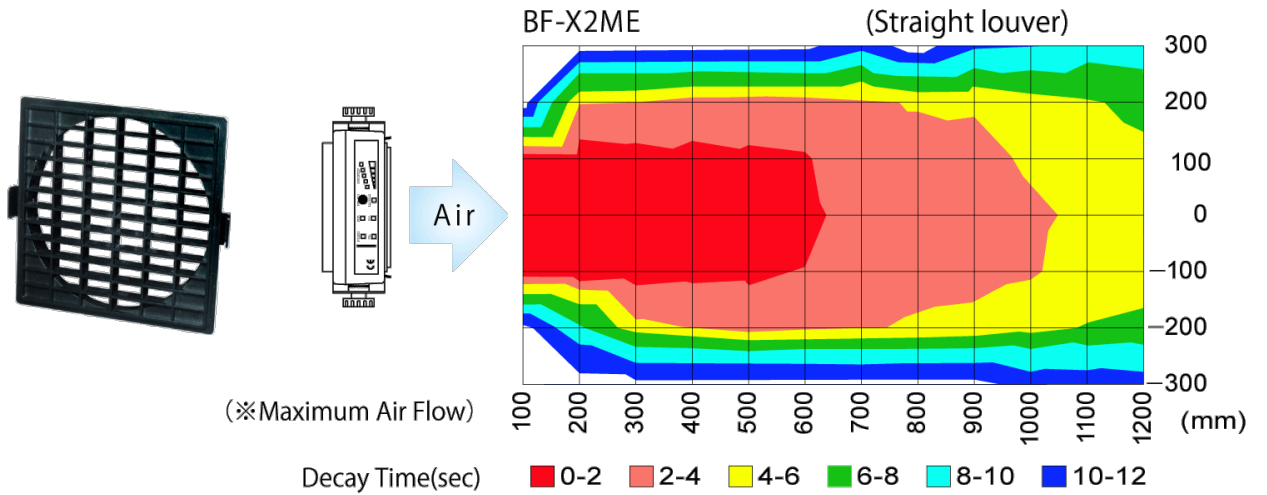

[Contact](#)

[Products Index](#)

**Specification**

WINSTAT BF-X2ME	
Model	BF-X2ME
Input Power	DC24V (AC adaptor AC100~240V available)
CAPACITY	12 VA
OUTPUT VOLTAGE	±7,500 V0-p
ION BALANCE	Below ±5 V(Distance at 300mm)

<b>Air Volume</b>	1.4 to 3.5 m <sup>3</sup> / min
<b>Air Speed</b>	1.5 to 2.9 m/sec(with Straight Louver at 300mm center)
	0.1 to 0.3 m/sec(with Wide angle Louver at 300mm center)
<b>Ozone Density</b>	Below 0.004 ppm(Distance at 150mm)
<b>Available Environment</b>	Indoor use, 0 to 40°C, 15~85%RH (without condensation)
<b>Filter</b>	Pre-filter level
<b>Signal Output</b>	MOS FET Relay Non-voltage contact (NC output) HV alarm or fan alarm: OFF
<b>Main unit Dimensions</b>	150×182×66 mm (W×H×D) not including Fixing Bracket and projecting portion
<b>Weight</b>	Appox 1000g(with Bracket)
<b>Noise Level</b>	59dB (A) (at 1m distance)
<b>Accessories</b>	Manual, AC Adaptor, Signal output cable, Cleaning Brush, Wide angle louver
<b>Optional Part</b>	Emitter Needle unit :DNU-W85 Filters :OBF-F2MA-1-10(package of 10)