

Product Informations

Our Product Lineup

High frequency type



Slim and light weight
Air ionizer

Static eliminator blower
WINSTAT BF-XZB

[Outline view](#)

[Specification](#)

• [about icons](#)



Feature of the product

- Compact Air Ionizer WINSTAT BF-XZB is slim and light-weight designed desktop ionizer with featuring SSD HF (high frequency) AC technology.
- Easy maintenance with detachable louver and Emitter needle unit.
- Wide or straight ionization with two kinds of louver part.
- With variable air speed controller.
- HV alarm function.



Straight Louver




Wide angle Louver



Options




Emitter needle unit
(DNU-W60)


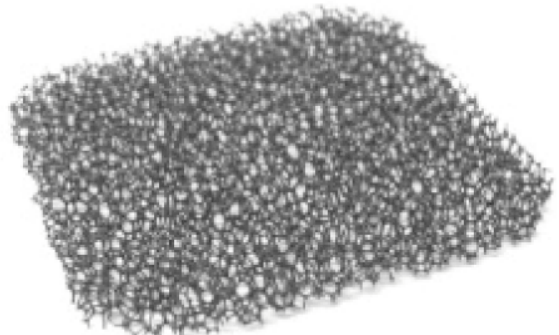


Filter for replacement
(10 sheets package)
(OBF-FZA-1-10)


Static elimination area

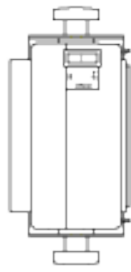

Static elimination area with Straight Louver

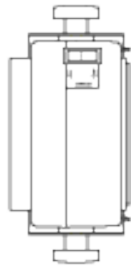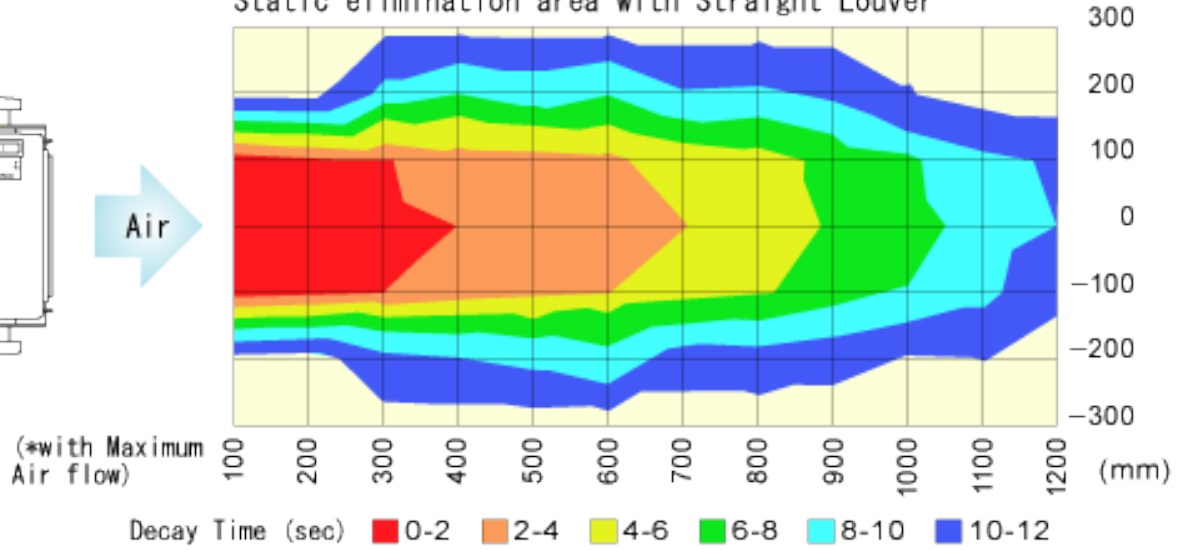

Static elimination area with Wide angle Louver

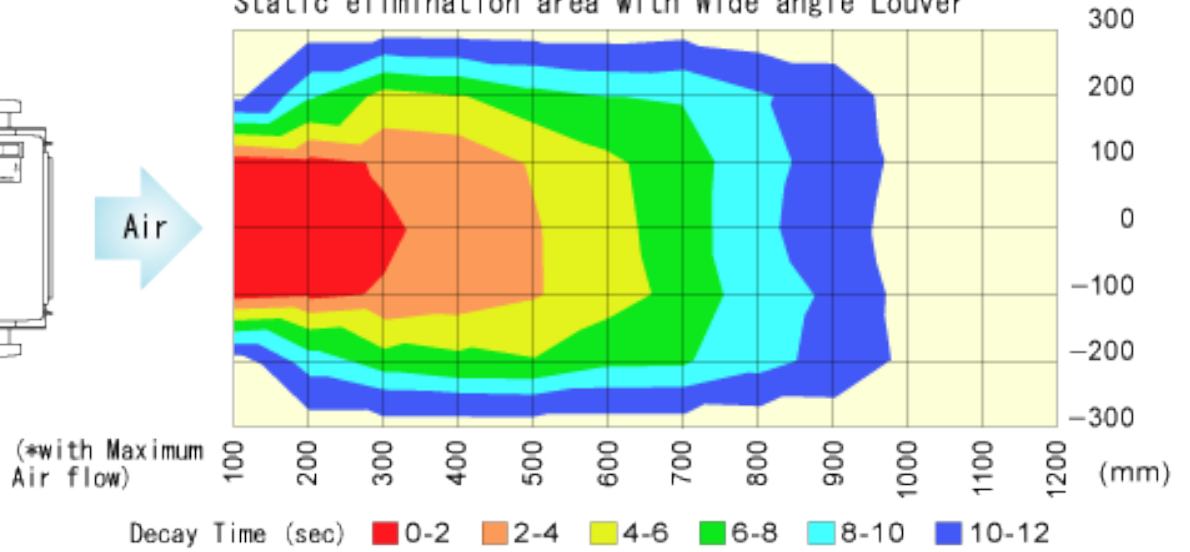

[Contact](#)

[Products Index](#)

WINSTAT BF-XZB	
Model	BF-XZB
Input power supply	24 VDC(AC adaptor AC100~240V available)
Capacity	7.2 VA
Output voltage	2.5 kVAC
Ion balance	±10 V or less (Distance at 300mm)

Airflow	1.0~1.7 m ³ / min
Air Speed	1.6~2.4 m/sec(with Straight Louver at 300mm)
	0.7~1.3 m/sec(with Wide angle Louver at 300mm)
Ozone density	0.04 ppm or less(Distance at 150mm)
Operating Environment	0 to 40°C / 15 to 65% RH (no condensation)
Main unit dimensions	104×126×50 mm (W×H×D) only body size
Weight	460 g (with Bracket)
Noise level	60 dB (A)(at 1m distance)
Indication	Green: Normal condition(H.V), Red: HV Abnormal(ALARM)
Alarm functions	Normal: ON, Abnormal (HV alarm with Red LED light): OFF MOS FET Relay, Normally Closed contact. Maximum current: 100mA, Voltage: Below 30VDC.
Accessories	Manual, AC Adaptor, Signal output cable(2m), Wide angle louver, Cleaning Brush.
Optional Parts	Discharge Emitter unit:DNU-W60 Filter (10pcs) (OBF-FZA-1-10)