

Product Informations

Our Product Lineup

High Frequency Air Ionizer





Optional for PIEZONIZER AGZ III
AGZIII Air Controller OAG III-CB

[Outline view](#)

[Specification](#)

Feature of the product

- By connecting air controller with AGZIII-OV ionized air gun, the air supply(ON/OFF) can be controlled by foot-pedal switch. Pulse mode with highly dust removal effect can be set-up.
- Controls AGZIII-OV's power and air supply ON/OFF.
- Ionized air supply can be set to pulse(10Hz or 5Hz)or continuous mode air blow. The pulse mode ionized air enhances the dust removal effect.
- Reduce the pressure from holding the grip by connecting to the external controlled foot-pedal switch.

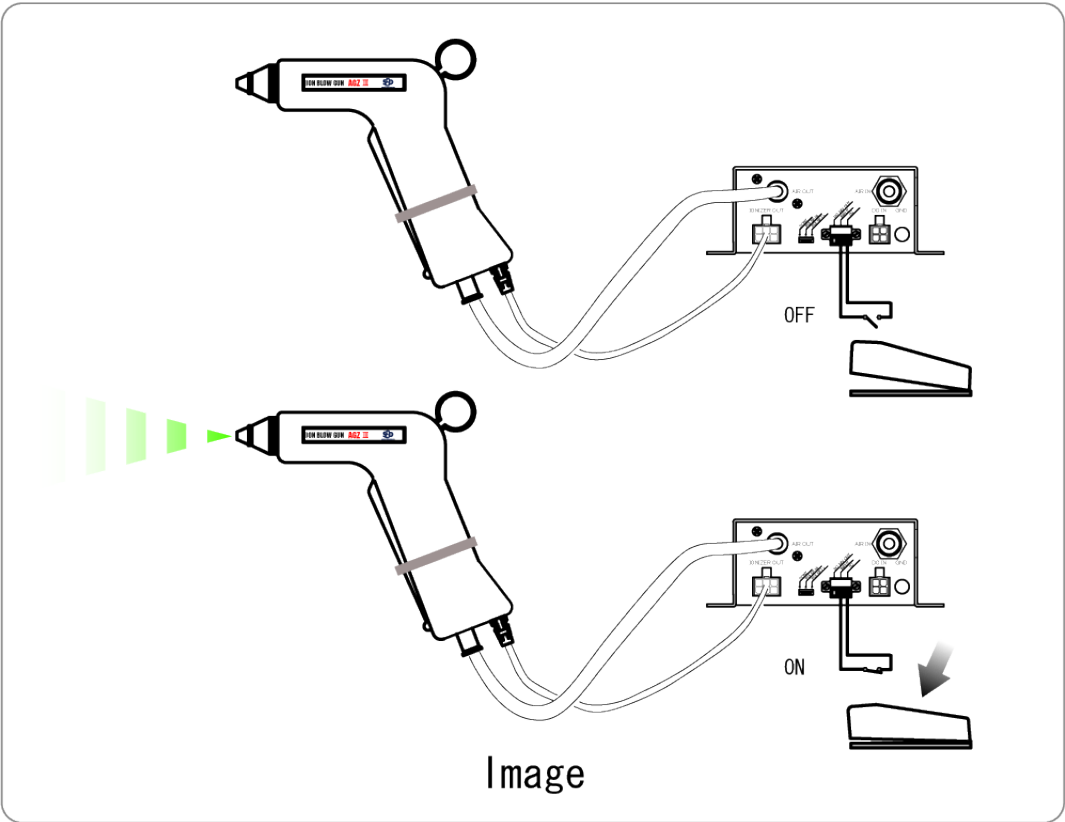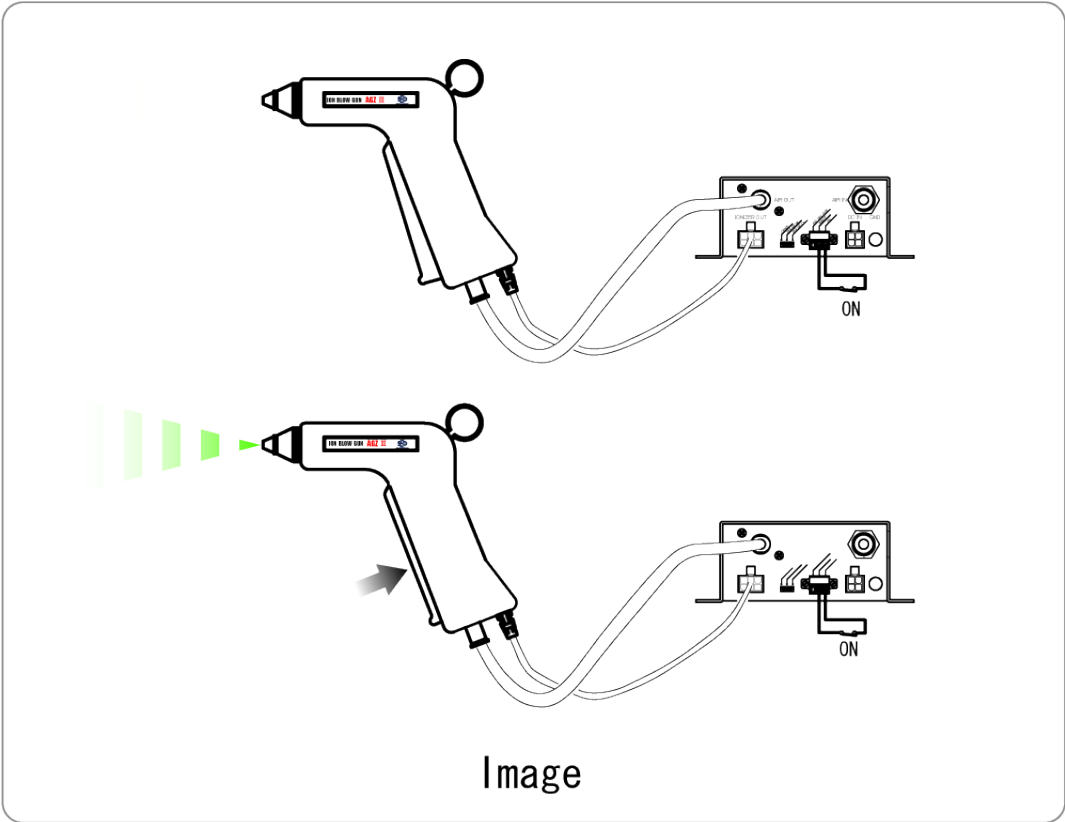

Contact

Products Index

Specification

PIEZONIZER AGZIII Air Controller OAGIII-CB	
Model	OAGIII-CB
Connection products	AGZIII or AGZIII -OV
Power Supply	DC24V AGZIIIAC adaptor (AC100~240V available)
Current	200mA (Use with AGZIII or AGZIII -OV)
Display	Green light: When power / air supply is on
Air Supply	Clean and Dry air
Air Pressure Range	0.05MPa~0.7MPa
Air Consumption	Max. 500ℓ/min (ANR) (Air consumption by air controller)
Air output setting	1:CONT: continuously blow 2:PULSE Hi: high pulse blow (10Hz) 3:PULSE Lo: low pulse blow (5Hz)*1
External Output (INPUT)	Contact input WORK:short circuit the two INPUT ports STOP:open the two INPUT ports
Environment	Temperature: Below 0 ~ 40°C Humidity: Below 85%RH (no condensation)
Dimension	135x55x75 mm (WxHxD)No Stand
Weight	Around 490g(Main Unit Controller only)
Accessories	Controller Unit, AC Adaptor conversion cable (2m), Air-gun conversion cable(0.3m), Ground wiring, Air tube (3m), Manual,

*1: The life span of the solenoid valve inside the controller is 50 million times ON/OFF.