

V-Force 30

NARROW WEB CLEANER



Industrial Static Control

WWW.SIMCOION.COM

SIMCO IONTM
An ITW Company



V-Force 30

Simco-Ion's V-Force 30 narrow web vacuum system is a unique high performing industrial vacuum cleaning system for narrow web machines. The V-Force 30 combines the power of static neutralization with high vacuum, high volume and high velocity allowing for ultimate cleaning.

This powerhouse system includes a non-contact cleaning hood with active static neutralizing bars and a self-contained Air Control System with isolated particle collection in an-all-in-one cabinet.

It can be easily installed onto any area of open web on most major narrow web presses and other narrow web machinery making it ideal for many applications.

System Advantages

- Suitable for thin film applications
- Coaxial hose design minimizes connections
- Quiet operation (<70 dB)
- Minimal floor space
- Simple installation
- Rugged stainless steel construction
- Removable particle collection trays
- Easy replaceable filters
- Non-regenerative blower design

Hood

V-Force 30's compact clam-shell hood design incorporates an optimized air management chamber that balances a high velocity air agitation curtain with dual optimized vacuum slots providing the highest efficiency clean.

The vacuum hood is low profile, designed for easy positioning within space constrained areas. The flexible hinged construction allows material to be thread through easily. The upper and lower hoods can also be separated, allowing for simple installation and maintenance.

The V-Force 30 hood integrates four barrier brushes to manage air velocity and air flow. It incorporates four shockless static bars to quickly neutralize and break the bond between charged particulate and the running web up to 2,000 ft per minute. This optimizes the cleaning performance and neutralizes the web surface. The hood is available for 6, 12, 18, 24 and 30 inch web widths.

Mounting

Universal mounting points are included in the hood's design allowing for vertical or horizontal mounting options. Position locking or swivel brackets are available for flexible web entry mounting. Performance is not affected by mounting angle.

Rollers

Can be customized for thin film support.



Hood Specifications

Web Speed (max)	2,000 ft/min, 610 m/min
Web Width (max)	30", 762 mm
Web Thickness (min)	1 mil (.001")
Duct Connections	3" coaxial vacuum/blow off
Static Control Active	110/240 VAC, 50/60 Hz
Mounting	Four 1/4 - 20 thread
Standard Opening	Manual with end hinges
Hood Widths	6, 12, 18, 24, 30
Hood Material	Mirrored stainless steel
Cross-section Dimensions	6.56" x 5.66"

Air Control System

The V-Force 30 Air Control System (ACS) is an all-in-one clean air blow-off/vacuum and collector support cabinet that drives our cleaning hood. This industrial powerhouse provides optimal filtration and airflow. The ACS's stainless steel enclosure incorporates enhanced acoustic isolation for blower and vacuum chambers making for an extremely quiet operation.

This compact integrated vacuum and blow-off system is designed for easy mobility and a minimal footprint in applications with limited space.


The Air Control System incorporates a non-regenerative blower design with dedicated turbines and filtered fresh air intake. No compressor needed. The quad turbine vacuum source is strategically designed so that there is no reduction of vacuum suction as each filter accumulates particles. Particle and dust collection trays are easily removable. HEPA filter optional.



Air Control System

Blower and vacuum motor speeds are independently controlled and room air cooled resulting in maximum system efficiency—two variable controls for vacuum and blow off air generation.


Optimized Blower / Vacuum Velocity

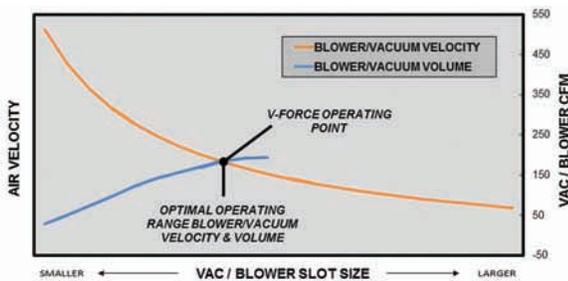


ACS Specifications

Amperage (max)	230V, 3-phase @ 20A
Decibel Rating	<70 dB at full operating speed
Remote Access	Remote on/off from PLC
Blow Off	Dedicated blow off turbine
Hose Diameter	3" outer, 1.25" inner
Dimensions	32"L x 22"W x 49"H
Turbines	6 motors - 80" H2O lift
Airflow	400 cfm vac; 200 cfm blow-off
Cabinet Material	Brushed stainless steel
Filter Ratings	Vacuum filter 2 µm; Blow-off filter 2 µm; HEPA filter 0.3 µm

How To Make Peak Power

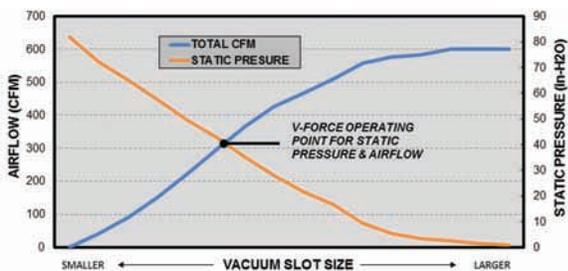

Achieving Peak Power

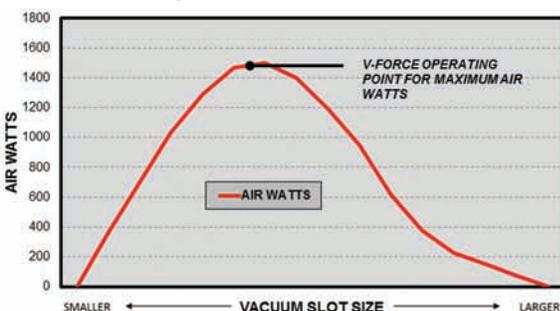

Typical Applications

The V-Force 30 can be used in a wide variety of non-contact applications.

- Specialty films
- Printing & Bindery
- Plastics
- Packaging
- Labeling
- Food
- Laminating
- Medical
- Converting
- Optical Coatings

Contact your Simco-Ion Representative for more details.

Simco-Ion, Industrial Group Teknek Americas

2257 North Penn Road
Hatfield, PA 19440
Tel: (215) 822-6401
Toll Free: (800) 203-3419
Fax: (215) 822-3795
customerservice@simco-ion.com
www.simco-ion.com

Simco-Ion Europe

Postbus 71, Lochem, Holland NL-7240 AB
Tel: +31 (573) 288333
Fax: +31 (573) 257319
general@simco-ion.nl
www.simco-ion.nl

Simco-Ion Japan

1-2-4, Minatojima Nakamachi, Chuo-Ku
Kobe-City, Japan 650-0046
Tel: +81 (78) 303-4651
Fax: +81 (78) 303-4655
info@simcoion.jp
www.simcoion.jp

Simco-Ion China

2/F, Bldg 11, Heng Ming Zhu Tech Pk
Xiang Xing Road, Sha Jing, Bao An
Shenzhen, Guangdong 518104
China PRC
Tel: +886 (3) 461-7177
Fax: +886 (3) 463-5457
www.simco-ion.cn

Simco-Ion Australia

6 Arlington Avenue
Castle Hill, NSW, Australia 2154
Tel: +61 (401) 000-444
Fax: +61 (2) 9475-5110
sales@staticsolutions.com.au

Simco-Ion Latin America

Rua Peixoto Gomide 724
Sao Paulo, SP 01409-000 Brazil
Tel: +1 (215) 337-4595
Tel in Brazil: +55 (11) 3230-6854
Fax (Miami FL): +1 (305) 675-2353
lasalesipd@simco-ion.com



An ITW Company

Simco-Ion Industrial Group

2257 North Penn Road
Hatfield, PA 19440
Tel: 800.203.3419
customerservice@simco-ion.com
www.simco-ion.com

© 2017 Simco-Ion. All rights reserved.
5201255 Rev A



w o r l d w i d e l e a d e r s i n s t a t i c c o n t r o l