



XIAMEN TOB NEW ENERGY TECHNOLOGY CO., LTD.

Provide A Full Set Of Solutions For Battery Machines.

SALES tob.amy@tobmachine.com

TECH SUPPORT +86-18120715609

Search..



Vacuum Mixing Machine 1-5 Litres

Vacuum Mixing Machine 1-5 Litres



- Brand:TOB NEW ENERGY
- Item No.:TOB-SFM-6E-5L
- Order(Moq):1set
- Payment:L/C,T/T,Western Union, Paypal
- Product Origin:China
- Shipping Port:XIAMEN
- Lead Time:7days

Product Detail

5L Electric Vacuum Mixing Machine Used For Lithium Cathode/Anode Slurry Mixing Process For Lab

SPECIFICATIONS

1 TOB-SFM-6Evacuum mixing machine is designed for making large batch of chemical compound via blending and mixing in single container under vacuum driven by electricity only.

2 The vacuum mixing machine is programmable in speed, time, and rotating direction, and water cold stainless steel tank promise high efficient in mixing.


3 The TOB-SFM-6Evacuum mixing machine is excellent for preparing LiCoO_3 , LiFePO_4 , Phosphors and ceramic slurry without gas bubble. And the processed material results in the better dispersion and uniformity.

Model	Vacuum mixing machine TOB-SFM-6E-5L
Features	<p>5 liter 304 stainless steel container with double layer water cooling jacket.</p> <p>Advanced T type sealing to keep vacuum pressure up to 12 hours.</p> <p>Double Step Rotary Vane Vacuum Pump, is included for immediate operation</p> <p>Container is opened or closed by electric motor (no air pump is required any more)</p> <p>Programmable controller to set time, speed, rotation direction.</p>
Voltage	<p>110-240V AC single Phase, 50/60Hz</p> <p>(build-in frequency converter to ensure the mixer can be used under 50 or 60 Hz)</p>
Rate Power	750 W
Rotor Rod Speed	0 -1400 RPM variable
Lifting	Electric motor (no compress are pump required any more)
Water Requirement	<p>16 L/min water flow required to cool mixing tank</p> <p>Cooling water 1/4" Inlet and outlet on the back of the mixing tank (with build-in cooling jacket)</p> <p>Suggest you order recirculating water chiller by click picture picture left to save water</p> <p>(water chiller is not included)</p>
Vacuum Pump	<p>Double Step Rotary Vane Vacuum Pump, is included</p> <p>Vacuum gauge is built in with minimum vacuum level -0.1 MPa</p>
304SS Container Size	270mm O.D. x 210mm I.D. x 230mm H

Dimensions	580mm(L) x 320mm(W) x 1340mm(H)
Net Weight	119 kg (262 lbs)
Warranty	One year limited warranty with lifetime support

PRODUCT DISPLAY



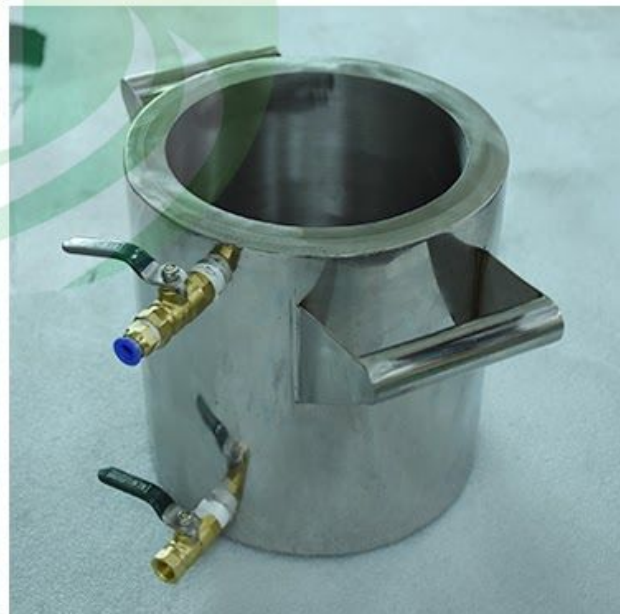

PACKING

