




A user-friendly temperature meter for universal applications

This robust instrument is designed to measure surface temperature without making contact under harsh industrial circumstances. The laser-sight identifies the target area while rubber parts on the housing protect the instrument against mechanical damage. An illuminated display allows working in dark or poorly lit environments.

Fast and simple operation, just point and shoot and the surface temperature is shown on the display within 500 mSec. Typical applications are with surfaces that are hard to reach, moving objects or electrical parts. It is used to measure parts in curing ovens, bearings, electrical junctions boxes, coolants, engines, plastic moulding, asphalt etc..

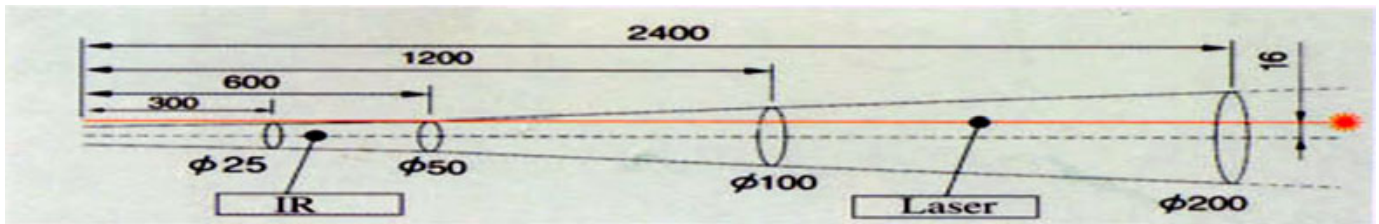

FEATURES

What is special
Automatic data hold, auto power off,
Backlit display, laser targeting, over
range indication, C°/ F° selectable, low
battery indication

DELIVERY

Delivery
Complete with pouch, manual and
battery.

ORDER

Ordernumber
TE1005

Specifications

Measuring range	-50 to +750°C
Resolution	0.1°C up to 200°C, 1°C over 200°C
Basic Accuracy	± 1.5% or reading r ± 2°C (whichever is greater)
Optical resolution	12:1 Distance to spot size
Emissivity	Fixed at 0.95
Power supply	9V battery type 1604A or IEC 6LR61
Weight & Dimensions	290 g. 100 X 56 X 230 mm.