



### Keyword search

### Light source boxes

Reflection

Spherical light sources

Integrating sphere

Illumination devices

Light guide type

Transmission

Luminance surface – Large (200mm or larger)

Luminance surface – Medium (100~200mm)

Luminance surface – Small (100mm or smaller)

Flicker reproduce light sources

Others



Others

Vibrating Platforms

Automotive

Broadcast camera

Security camera

# Portable one axis vibrating platform– V50

Catalog Download

- Reproduce the vibration of 1 axis
- Simpler structure and smaller body than V100
- Most suitable for an outside demonstration and a simple inspection

## Vibration generator V50 operation instructions



[View the product in 3D](#)

(There may be parts that are different from the actual product or parts that are not displayed due to capacity reasons)

Infrared

## Luminance / light quantity meters

Luminance meter / LV checker

Flash meters

## Lens testers

f number meters

Focal length testers

Chart collimators

Other testers


## Shutter testers

Transmission

Reflection

Lens shutter testers



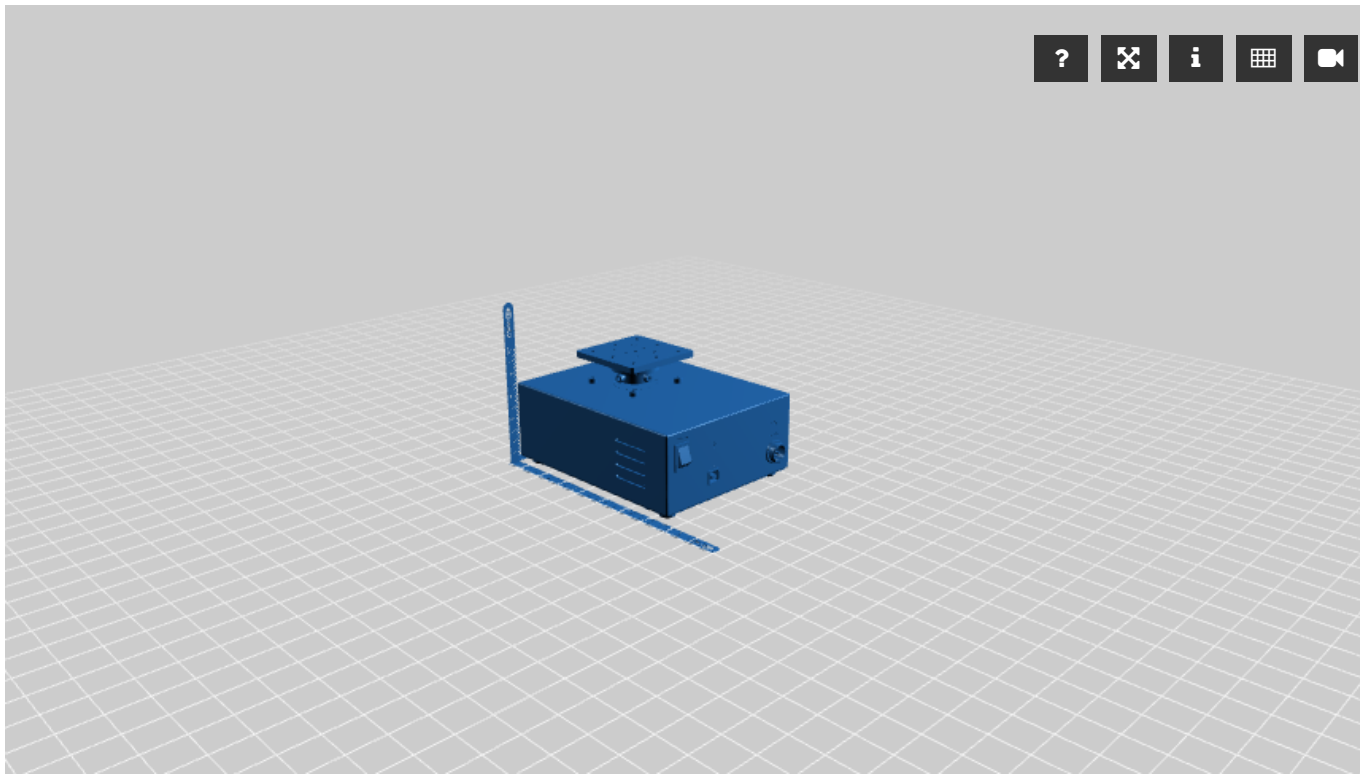



Bookmark

Model	V50
function	Sine wave pattern vibration Memorize and Invoke the amplitude and the frequency programs
Load capacity [kg]	0.5
Frequency [Hz]	0.5-10.0
Amplitude [deg]	+/-0.1-1.0
Communication I / F	USB 2.0
Power-supply voltage	AC100-240V 50/60 Hz
Power consumption [VA]	Less than 40



Operating environment	Temperature: 5-45 [°C] Humidity: less than 80 [%] without dew condensation
Dimensions (WxHxD) [mm]	140x98.4x180
Weight [kg]	2.2
Accessories	AC adapter
Extension	Camera mount PC control software

 **Inquiry about this product**

	<p>&lt; High color rendering LED Light source box– VLB-1411FBC-CRI</p>	<p>One axis vibration generator– V100 &gt;</p>	
---	--	--	---

Related product

		
<p>Visible + NIR broad lighting SOL-80VNIR</p>	<p>NIR High intensity illumination–SOL-900-06IR85/94</p>	<p>Chart Collimator– AFC series</p>



## Light source boxes

Reflection  
Spherical light sources  
Integrating sphere  
Illumination devices  
Light guide type  
Transmission  
Luminance surface – Large  
(200mm or larger)  
Luminance surface – Medium  
(100~200mm)  
Luminance surface – Small  
(100mm or smaller)  
Flicker reproduce light sources  
Others  
Infrared

## Lens testers

f number meters  
Focal length testers  
Chart collimators  
Other testers

## Shutter testers

Transmission  
Reflection  
Lens shutter testers

## Luminance / light quantity meters

Luminance meter / LV checker  
Flash meters

## Others

Contrast testers  
UV exposure devices  
Vibrating Platforms  
General-purpose optical components



TSUBOSAKA ELECTRIC CO., LTD.

Copyright © TSUBOSAKA ELECTRIC Co., Ltd. All Rights Reserved.

